

HSPF

TECHNICAL SPECS:





Current Rating: 1.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C360000)
 Contact plating: Au over Ni
 Connecting Pin: ∅0.41mm
 Insulator Material: PPS+30%G.F.(UL94V-0)

Ordering Information

3514-192 XX M XX 081 X 1

No. of Pin: 2-50PIN
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Packing: T=Tube, R=Tray&Reel

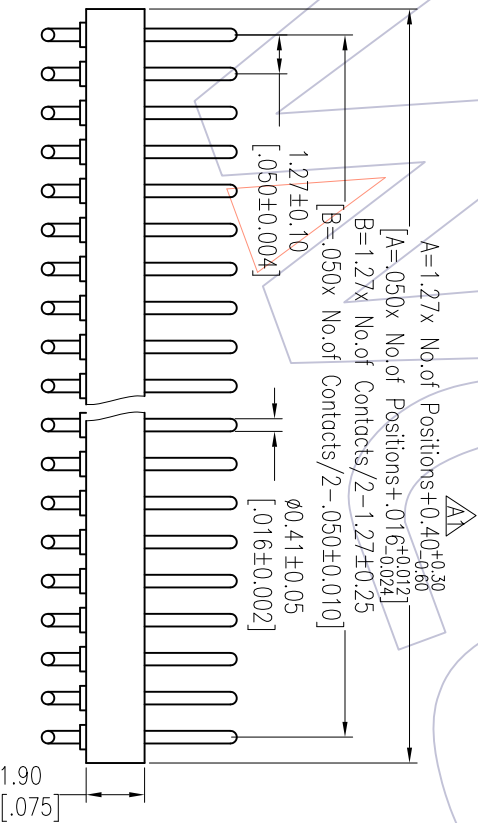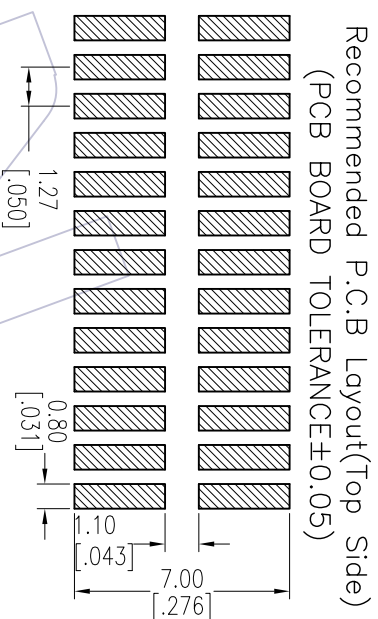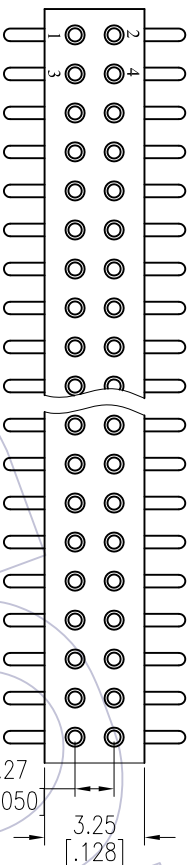

Item	Pitch	Mating
Standard	1.27	3524
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2013/05/21	modify drawing	---	XX	Wang	2013/05/21	UNIT	mm	3514-192XXMXX081X1
A0	2012/10/18	NEW	---	X:XX	CHECK	DATE	SIZE	A4	TITLE:
				X:XXX	±0.15	DATE	SHEET	1/1	1.27mm MACHINED PIN HEADER
				Angle	± 3'	DATE	PROJ.		DUAL ROW 180° SMT H=1.90 L=8.1
				DM	TOL	DATE			Customer NO.

WCON

Http: www.wcon.com
 WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com
 WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com