
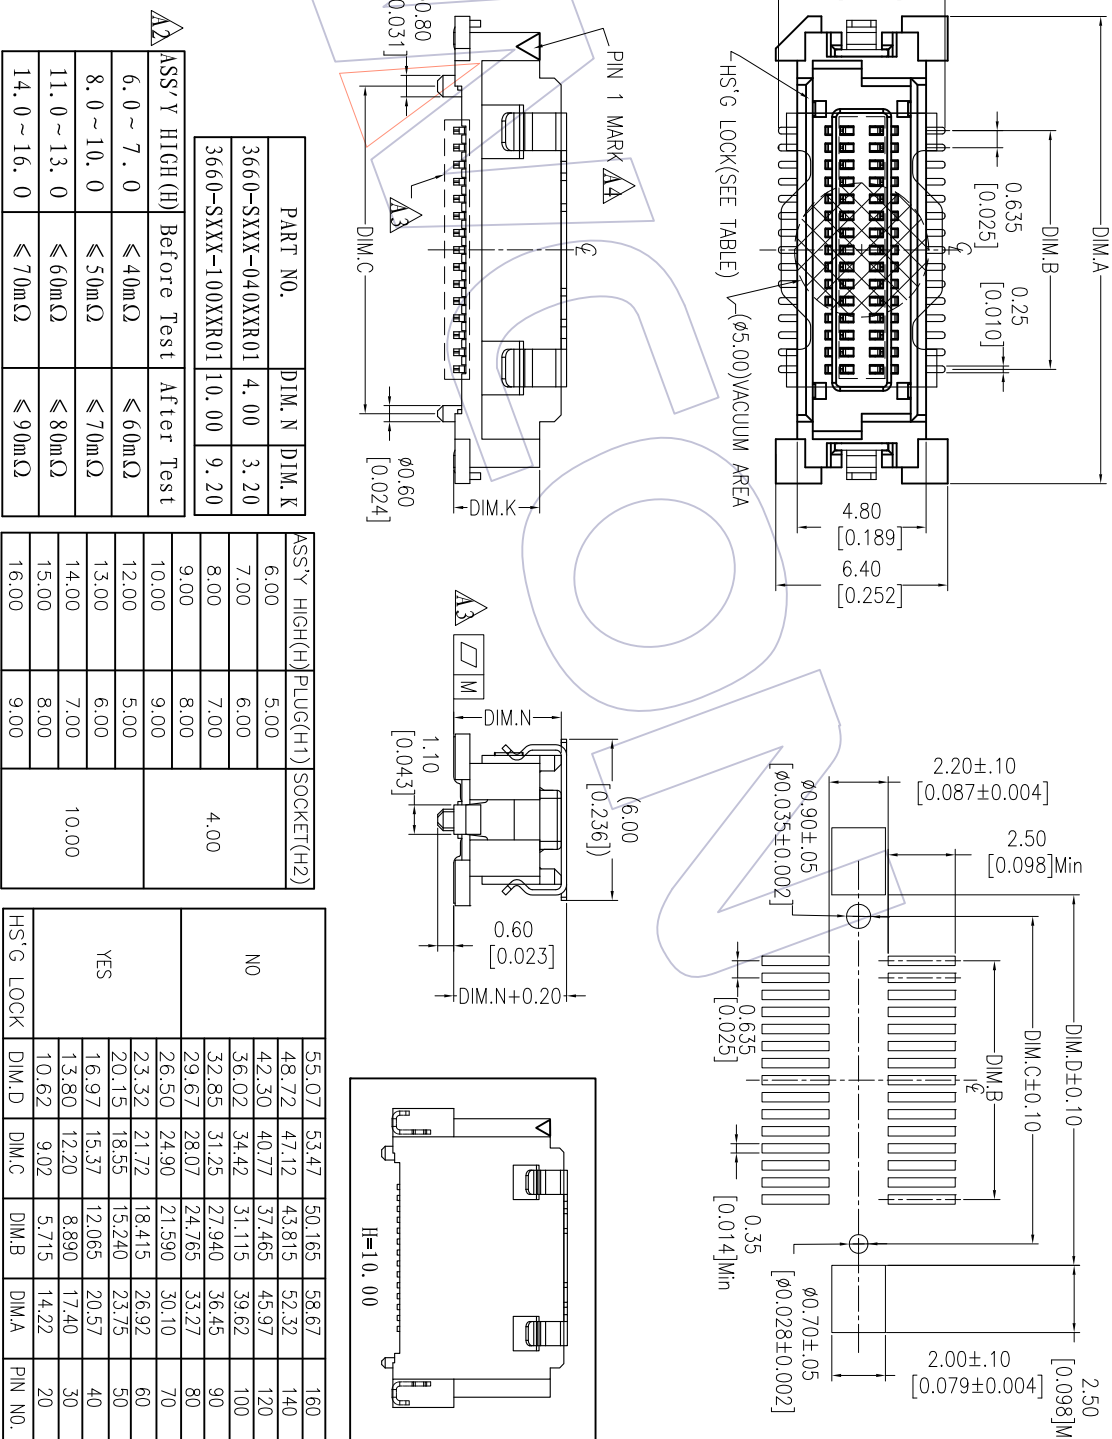


- NOTES:
- 1-Electrical Performance:
  - 1-1 Current Rating:0.5 A at AC 100V.
  - 1-2 Withstand Voltage:250V AC.
  - 1-3>Contact Resistance:See Table.
  - 1-4:Insulation Resistance:1000MΩ Min.
  - 1-5:Operation Temperature:-55℃to+85℃
  - 2.Material:
  - 2-1.Housing:ICP-Black/Natural;UL94V-0.
  - 2-2.Contact:Phosphor Bronze;T=0.20mm.
  - 2-3.Fitting Nail:Brass;T=0.25mm.
  - 2-4.Metal Cap :Stainless Steel;T=0.20mm.
  - 3.Finish:
  - 3-1.Contact:Gold Plating On Contact Area;
  - Matte Tin Plating On Solder Trails Over Ni.
  - 3-2.Fitting Nail:Sn Plating Over, Ni Under Plating

Flatness: <80Pins The "M" Is 0.12mm MAX  
≥80Pins The "M" Is 0.15mm MAX

## Ordering Information

3660-S XXXX - XXXX XX R 01

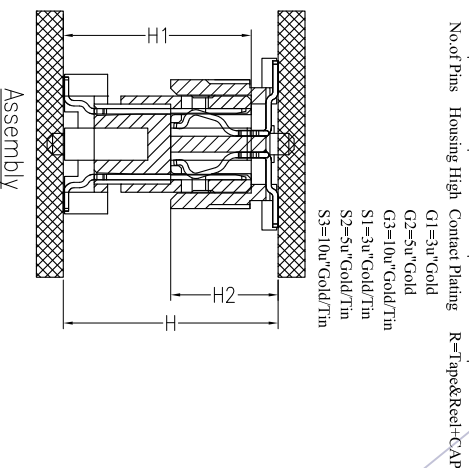

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	CUSTOMER NO.	WCON-Dongguan	WCON-Kunshan
A4	2014/05/07	Modify	△4	XX	Allen	2014/05/07	mm		3660-SXXX-XXXXXR01	0.635mm BTB "M" FEMALE SMT TYPE		Tel: +86 769 85358920	Tel: +86 512 57468408
A3	2014/03/24	Modify The Contact Resistance	△3	XXX	CHECK		inch					Fax: +86 769 85358915	Fax: +86 512 57468468
A2	2014/03/07	Modify The Housing Material Color	△2	XXXX			A4					E-mail: sdles@wcon.com	E-mail: sdles@wcon.com
A0	2012/11/14	NEW		Angle ± 3°	APPROVE		1/1						



Http: www.wcon.com