



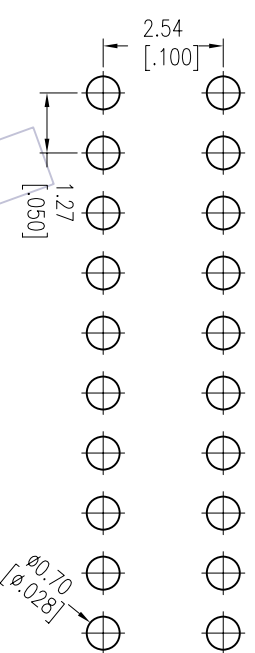

NOTES:  
 Rated Current:1.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40℃ to +105℃  
 Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+30%G.F UL94V-0 BK

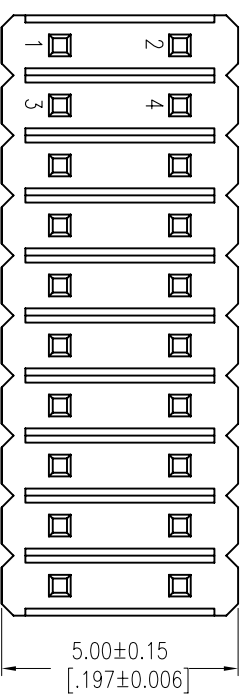



Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

## Ordering Information

1425-12 XX XX S XXX X 1

No. of Pins Contact Plating Pin Length Packing  
 Per Row:02-50 G0=Gold Flash L=A+B+2.5 A=Tray  
 G3=10u"Gold Standard:071=7.1 T=Tube  
 G4=15u"Gold 103=10.3  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin

Item	Pin Length	A	B	Mating
Standard	7.10	1.80	2.80	2446
Alternate	10.30	1.80	6.00	2485

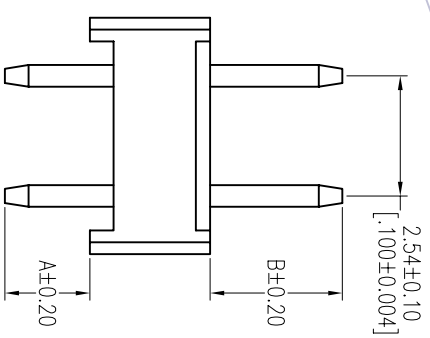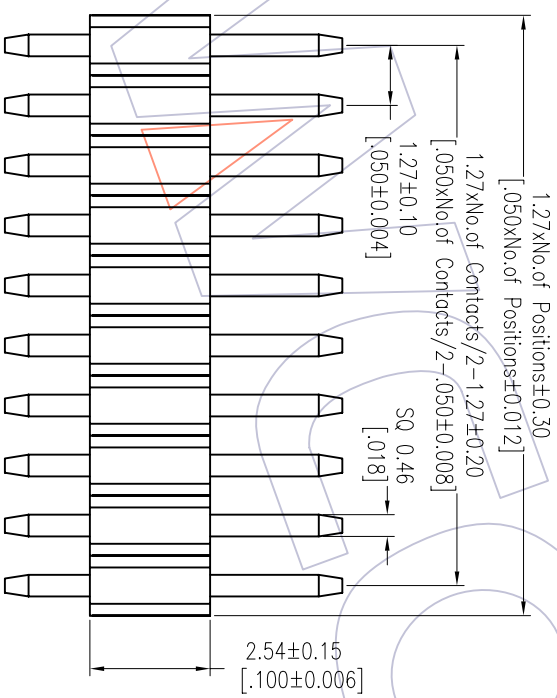

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A0	2012/04/06	NEW	-----	XX	<i>William Diao</i>	2012.04.06	mm	1425-12XXXXXX	PHI. 27*2.54 DUAL ROW 180° H=2.54	Tel: +86 769 85358920	Tel: +86 512 57468408
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	XX	CHECK	DATE	UNIT	Customer NO.		Fax: +86 769 85358915	Fax: +86 512 57468468
				X.XXX	CHECK	DATE	SIZE			E-mail: sales@wcon.com	E-mail: sales@wcon.com
				Angle	APPROVE	DATE	SHEET				
				± 3'			1/1				
				DIM	PROJ.						
				TOL							



Http: www.wcon.com

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com